


RX27-3/RY27-3 型插脚式瓷壳线绕电阻器 3W-20W

RX27-3 Porcelain Housing Pinned Type Wire Wound Resistors 3W-20W

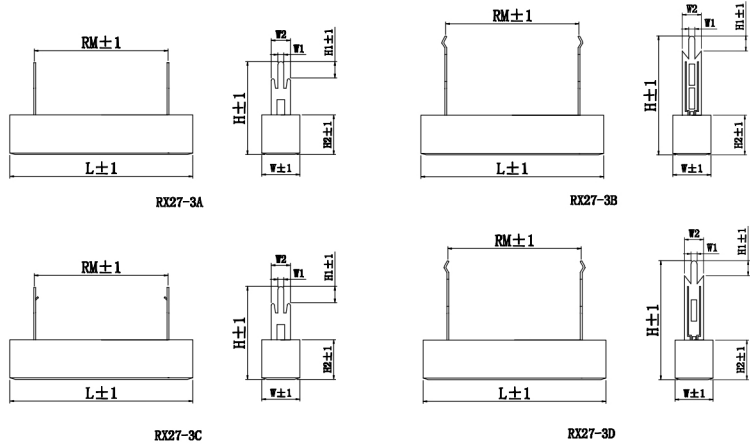

产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 可提供安装套件（选购件）
Assembly and fittings (available)
- 高过载能力
High over loading ability

应用范围 Applications

- 电力分配，负荷测试
Electric power distribution, load test
- 用于电源等回路的限流、均流或取样检测
Applied for current limited current balance or sampling for testing
- 适用于功率电源
Ideal for functional power supply
- 变频电源等领域
Inverter power supply etc

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range		外形尺寸 Dimensions (mm)							
		RX27-3	RY27-3	L	RM	H	H2	H1	W	W2	W1
RX27-3/ RY27-3	3.0	R2 ~ 2K4	390R ~ 100K	25 ± 0.5	12.5	9.0	23.5/39/23.5/39.5/30	4.5 ± 0.3	9.0 ± 0.5	5/7.3	1.5
	5.0	R22 ~ 3K6	680R ~ 100K	27 ± 0.5	15.0	9.5	24/39/24/39/30/39	4.5 ± 0.3	9.0 ± 0.5	5/7.3	1.5
	7.0	R39 ~ 4K7	680R ~ 100K	35 ± 0.8	22.5	9.5	24/39/24/39/30/39	4.5 ± 0.3	9.0 ± 0.5	5/7.3	1.5
	10.0	R39 ~ 6K8	1K0R ~ 100K	48 ± 1.0	35.0	9.5	24/39/24/39/30/39	4.5 ± 0.3	9.0 ± 0.5	5/7.3	1.5
	15.0	R51 ~ 7K5	-	48 ± 1.0	32.0	12.5	32.5/47.5/32.5	5.0 ± 0.2	12.5 ± 0.5	10/-	2.7
	20.0	R51 ~ 10K	-	63.5 ± 1.2	47.5	12.5	32.5/47.5/32.5	5.0 ± 0.2	12.5 ± 0.5	10/-	2.7

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RX27-3A/RY27-3	10W	10R	± 5%